



## STANDARD MANIFOLD LINE MOUNT BODIES

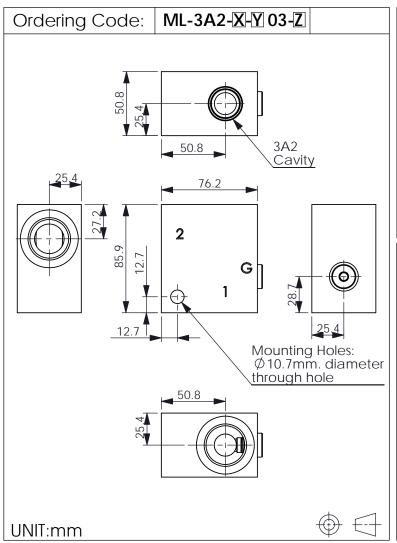



## **TECHNICAL DATA**

Aluminum Body Pressure Rating: 210 bar

Ductile Iron

Body Pressure Rating: 350 bar

## Cavity:

Refer to 3A2

\* Refer to Winner Cartridge Valves Catalog.

Aluminum	0.7 kg(WITHOUT VALVES)
Ductile Iron	2.0 kg(WITHOUT VALVES)

<sup>\*</sup> If you need the special specification. Please contact us.

function (flow > pressure > ... etc.)

	F	PORT SIZE		
X	PORTS	PORT		
	1,2	G		
G08G	<b>8G</b> G 1"	G 1/4"		
S08G	SAE 8	1/4"NPT		
\$10G	OG SAE 10	1/4"NPT		

Υ	BODY MATERIAL	Z	CARTRIDGE VALVES SELECTION	
Α	HIGH-STRENGTH ALUMINUM		WITHOUT VALVE	
S	DUCTILE IRON	RP0A	RP3A20AL(200 LPM,7~210 bar)	
		RD5A	RD3A25AL(200 LPM,35~210 bar)	
		The selection is only example. Please refer to Winner Cartridge Program and to select the appropriate valves and maniflods assembly in accordance with request		

Rev.140220 M.03A.401