



Ordering Code: **ML-5A2-X-Y 01-Z**

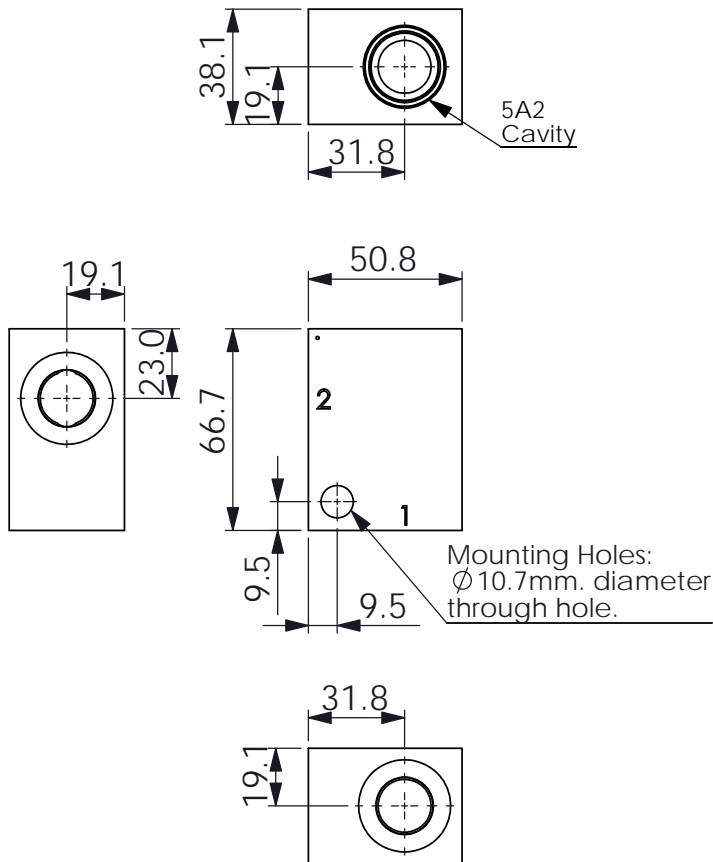

UNIT:mm

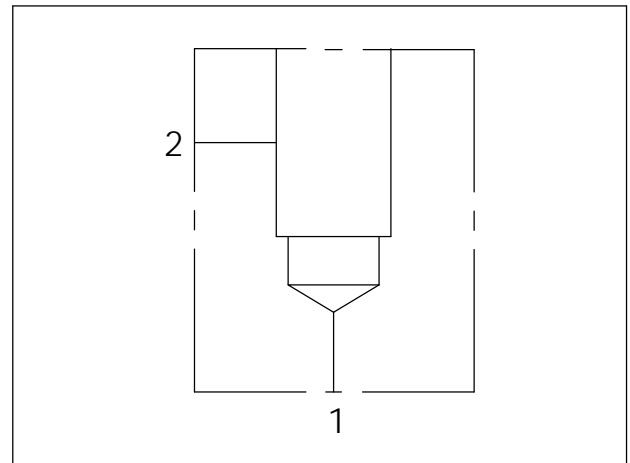

TECHNICAL DATA

Aluminum Body Pressure Rating: 210 bar
Ductile Iron Body Pressure Rating: 350 bar

Cavity:

Refer to 5A2

* Refer to Winner Cartridge Valves Catalog.

Aluminum	0.25 kg(WITHOUT VALVES)
Ductile Iron	0.75 kg(WITHOUT VALVES)

* If you need the special specification. Please contact us.

PORT SIZE

X	PORT SIZE		
	PORT 1	PORT 2	
G03	G 3/8"	G 3/8"	
G04	G 1/2"	G 1/2"	
S08	SAE 8	SAE 8	
S10	SAE 10	SAE 10	

Y BODY MATERIAL

A	HIGH-STRENGTH ALUMINUM	
S	DUCTILE IRON	

Z CARTRIDGE VALVES SELECTION

	WITHOUT VALVE	
CV03	CV5A2003N(160LPM,0.3bar)	
FR0A	FR5A20AL(45LPM,350bar)	
NV33	NV5A2033L(350bar)	

The selection is only example. Please refer to Winner Cartridge Program and to select the appropriate valves and manifolds assembly in accordance with request function (flow 、 pressure 、 ... etc.)