



Ordering Code: **ML-16A2-X-Y 03-Z**

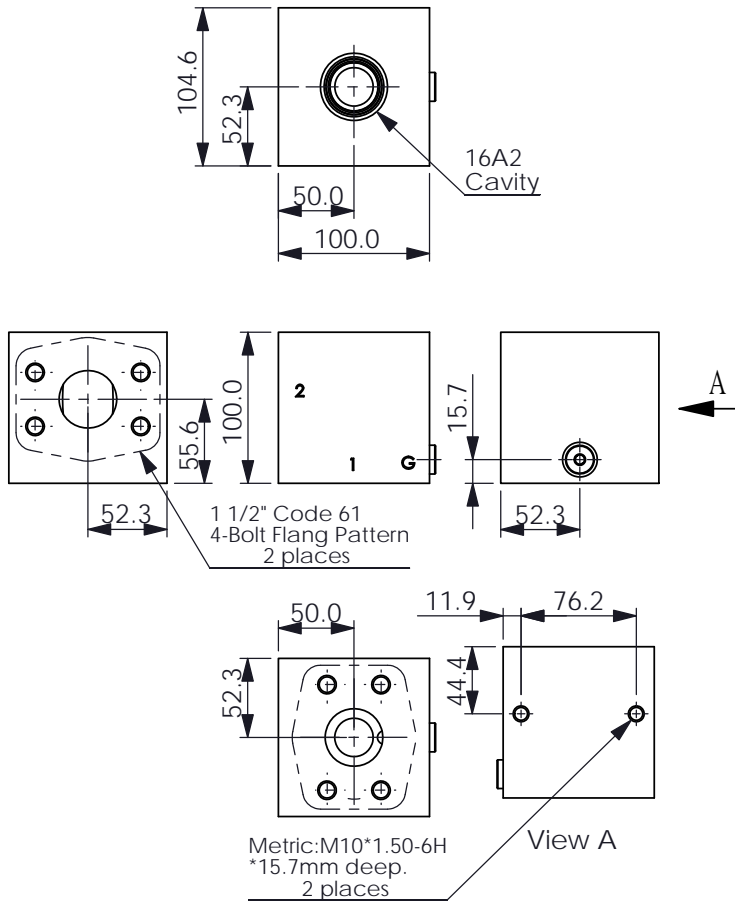

UNIT:mm

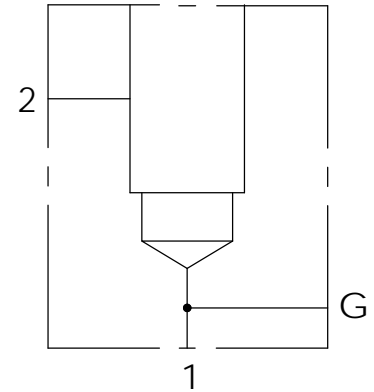

TECHNICAL DATA

Aluminum Body Pressure Rating: 210 bar
Ductile Iron Body Pressure Rating: 350 bar

Cavity:

Refer to 16A2

* Refer to Winner Cartridge Valves Catalog.

Aluminum	2.4 kg(WITHOUT VALVES)
Ductile Iron	6.8 kg(WITHOUT VALVES)

* If you need the special specification. Please contact us.

PORT SIZE

X	PORTS	PORT	
	1,2	G	
F30G	1 1/2" Code 61 4-Bolt Flang Pattern	G 1/4"	

Y BODY MATERIAL

A HIGH-STRENGTH ALUMINUM

S DUCTILE IRON

Z CARTRIDGE VALVES SELECTION

WITHOUT VALVE

RP0A RP16A20AL(380 LPM,7~210 bar)

CV03 CV16A2003N (320LPM,0.3bar)

FR0A FR16A20AL (0.8-95LPM)

The selection is only example. Please refer to Winner Cartridge Program and to select the appropriate valves and manifolds assembly in accordance with request function (flow 、 pressure 、 ... etc.)