



STANDARD MANIFOLD LINE MOUNT BODIES

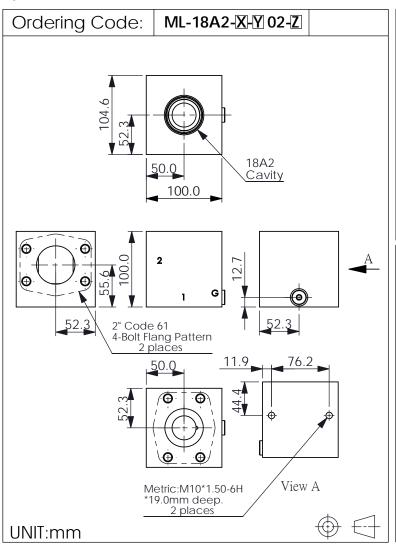



TECHNICAL DATA

Aluminum Body Pressure Rating: 210 bar

Ductile Iron

Body Pressure Rating: 350 bar

Cavity:

Refer to 18A2

* Refer to Winner Cartridge Valves Catalog.

Aluminum	2.4 kg(WITHOUT VALVES)
Ductile Iron	6.2 kg(WITHOUT VALVES)

^{*} If you need the special specification. Please contact us.

	PORT SIZE		
X	PORTS	PORT	
	1,2	G	
F30G	2" Code 61 4-Bolt Flang Pattern	G 1/4"	

Υ	BODY MATERIAL	
Α	HIGH-STRENGTH ALUMINUM	
S	DUCTILE IRON	

Z	CARTRIDGE VALVES SELECTION			
	WITHOUT VALVE			
RP0A	RP18A20AL (760LPM,7-210bar)			
CV03	CV18A2003N (640LPM,0.3bar)			
FROA	FR18A20AL (1.0 to 200LPM)			
The selection is only example Please refer to Winner				

The selection is only example. Please refer to Winner Cartridge Program and to select the appropriate valves and maniflods assembly in accordance with request function (flow `pressure ` ... etc.)