



STANDARD MANIFOLD **LINE MOUNT BODIES**

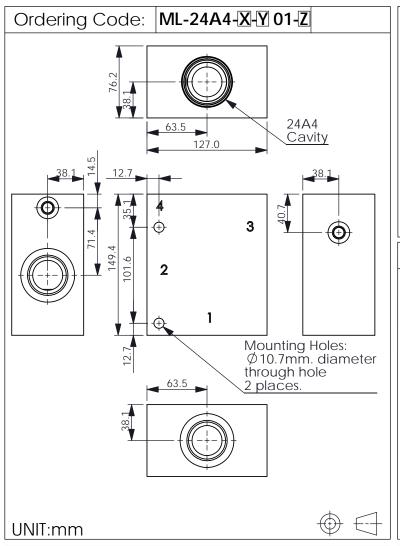



TECHNICAL DATA

Aluminum Body Pressure Rating: 210 bar

Ductile Iron

350 bar Body Pressure Rating:

Cavity:

Refer to 24A4

* Refer to Winner Cartridge Valves Catalog.

Aluminum	3.2 kg	(WITHOUT VALVES)
Ductile Iron	8.7 kg	(WITHOUT VALVES)

^{*} If you need the special specification. Pléase contact us.

X	F	PORT SIZE		
	X PORTS	PORTS		
	1,2	3,4		
G08A	608A G1"	G1/4"		
G10A	G10A G1-1/4 "	G1/4"		
S16A	S16A SAE 16	SAE 6		
S20A	320A SAE 20	SAE 6		

Υ	BODY MATERIAL		Z	CARTRIDGE VALVES SELECTION	
Α	HIGH-STRENGTH ALUMINUM			WITHOUT VALVE	
S	DUCTILE IRON		CWAH	CW24A4AHL (1:1,70-280bar)	
			The selection is only example. Please refer to Winner Cartridge Program and to select the appropriate valves and maniflods assembly in accordance with request function (flow > pressure > etc.)		

Rev.140411 M.24A.401